

# Cassette tipo EU preforate

Box type EU pre-drilled




Settori di Impiego / Areas of application



**Caratteristiche / Characteristics:**

Scatole di derivazione in alluminio pressofuso UNI 5069 con vite di messa a terra interna. Il coperchio di ispezione con bordo paraspruzzo, completo di guarnizione, assicura un grado di protezione IP65 e temperature d'impiego -40°C +100°C. Vengono fornite preforate per filetti GAS - PG - ISO da definirsi in sede d'ordine, come sotto esposto, corredate di ghiera filettate e guarnizioni di tenuta

Junction boxes made of die-cast aluminium UNI 5069 with internal grounding screw. The inspection cover provided with gasket, assures a degree of protection IP65 and temperature range -40°C and +100°C. They are provided with GAS-PG-ISO threads to be defined as written below, completed of thread locknuts and gaskets

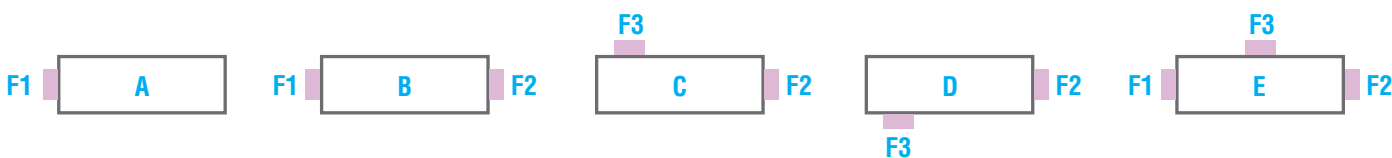

Codice cassetta Box code	Codice preforatura Configuration code	Filetto F1,F2,F3 Thread GAS	Filetto F1,F2,F3 Thread PG	Filetto F1,F2,F3 Thread ISO METRICO	Protezione Protection	Temp. di esercizio Temp. of exercise	Dimensioni Sizes
EU01	A - B - C - D - E	1/4"	9	16*1,5	IP65	-40°C +100°C	95 * 46 * 48
		3/8"	11	20*1,5			
		1/2"	13,5	25*1,5			
		3/4"	16	-			
EU02	A - B - C - D - E	1"	21	32*1,5	IP65	-40°C +100°C	105 * 55 * 54
EU03		1" 1/4	29	40*1,5			
EU04	A - B - C - D - E	-	36	-	IP65	-40°C +100°C	120 * 73 * 75
		1" 1/2	42	50*1,5			
		2"	48	63*1,5			130 * 130 * 84

**Esempio d'ordine / Example of order:**

**EU03 E F1-1" 1/4 F2-PG36 F3-ISO32**

È possibile richiedere per un formato cassetta più grande filetti di formati cassette più piccoli e non viceversa  
It's possible to require, for a box format bigger, smaller threads but not vice versa